



PH 6801 0022

#3

U.S.A.

I-II



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



The undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in a certificate and any accompanying documents has re-registered under the Companies Act 1985 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in the certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc or L. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated


08 JUL 2001

CERTIFIED COPY OF  
PRIORITY DOCUMENT

**THIS PAGE BLANK (USPTO)**

**Request for grant of a patent**

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office  
Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference PHGB010005 15JAN01 E598020-1 D02879  
P01/7700 0.00-0100991.9

2. Patent application number  
(The Patent Office will fill in this part) **0100991.9** 13 JAN 2001

3. Full name, address and postcode of the or of each applicant (*underline all surnames*) KONINKLIJKE PHILIPS ELECTRONICS N.V.  
GROENEWOUDSEWEG 1  
5621 BA EINDHOVEN  
THE NETHERLANDS

Patents ADP Number (if you know it) 4741929 4001

If the applicant is a corporate body, give the country/state of its incorporation THE NETHERLANDS

4. Title of the invention RADIO COMMUNICATION SYSTEM

5. Name of your agent (if you have one) Kevin James SCOTT  
"Address for service" in the United Kingdom Philips Corporate Intellectual Property  
to which all correspondence should be sent Cross Oak Lane  
(including the postcode) Redhill  
Surrey RH1 5HA

Patents ADP number (if you know it) 7658883001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority Application number (if you know it)	Date of filing (day/month/year)
---------	---	------------------------------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day/month/year)
-------------------------------	------------------------------------

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

Continuation sheets of this form

Description	12
Claims(s)	5
Abstract	1
Drawings	3 <i>only</i>

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and  
search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(*Please specify*)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date *12<sup>th</sup> January 2001*

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 815281

(Kevin J. Scott)

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered "Yes" Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

## DESCRIPTION

**RADIO COMMUNICATION SYSTEM**

5       The present invention relates to a radio communication system and further relates to primary and secondary stations for use in such a system and to a method of operating such a system. While the present specification describes a system with particular reference to the Universal Mobile Telecommunication System (UMTS), it is to be understood that such  
10 techniques are equally applicable to use in other mobile radio systems.

      There is a growing demand in the mobile communication area for a system having the ability to download large blocks of data to a Mobile Station (MS) on demand at a reasonable rate. Such data could for example be web  
15 pages from the Internet, possibly including video clips or similar. Typically a particular MS will only require such data intermittently, so fixed bandwidth dedicated links are not appropriate. To meet this requirement in UMTS, a High-Speed Downlink Packet Access (HSDPA) scheme is being developed which may facilitate transfer of packet data to a mobile station at up to 4Mbps.

20       In known radio communication systems, at any one time a MS generally communicates with a single Base Station (BS). During the course of a call the MS may wish to investigate transferring to another BS, for example when the quality of the communication link deteriorates as the MS moves away from its BS, or when the relative traffic loading of different cells requires adjusting. The  
25 process of transferring from one BS to another is known as handover.

      In a system operating according to the current UMTS specifications, the MS maintains a list of BSs known as the "active set" with which radio links of reasonable quality can be maintained. When the MS is in dedicated channel mode, and there are multiple BSs in the active set, the MS is in "soft handover"  
30 with the BSs in the active set. In this mode uplink transmissions are received by all BSs in the active set, and all BSs in the active set transmit substantially the same downlink information to the MS (typically the data and most of the

control information would be the same, but power control commands could be different). A drawback of this "soft handover" approach is that the uplink and downlink transmission powers cannot be optimised for each individual radio link, as only one set of power control commands is transmitted in the uplink, while the power control commands transmitted over the downlink from different BSs may result in conflicting requirements for the uplink transmission power.

The normal soft handover procedure is particularly suitable for real time services such as voice links, where a continuous connection must be maintained. For packet data links, however, it can be advantageous to select the optimum BS for the transmission of each data packet to a MS, to allow for dynamically changing radio link and traffic conditions. Improved system throughput can be achieved if the selection of the optimum BS is made immediately prior to transmission of each packet, by minimising the number of packets received in a corrupted state and also minimising total transmitted power per packet.

Once the optimum BS has been chosen, other characteristics of the link for transmission of the data packet need to be set. In a UMTS system these characteristics may include a suitable Modulation and Coding Scheme (MCS) and an appropriate transmission power level. It is also desirable to minimise the signalling required to provide such facilities.

An object of the present invention is therefore to enable rapid BS selection while minimising the required signalling.

According to a first aspect of the present invention there is provided a radio communication system having physical control channels arranged for the bi-directional transmission of sets of control information between a secondary station and a plurality of primary stations, and at least one data channel between one or more primary stations, selected from the plurality of primary stations, and the secondary station for the transmission of data from the or each selected primary station to the secondary station, wherein respective closed-loop power control means are provided for adjusting individually the power of some or all physical control channels, or parts thereof, to which a set

of control information is mapped and means are provided for determining which of the primary stations comprise the selected primary station or stations in response to changing radio link conditions.

By enabling rapid selection of the optimum BS at any moment, a number of advantages are provided. In particular, the delay before transmission of each packet is reduced, while accurate power control at the start of each packet is ensured even if the transmitting BS has changed. Also, the choice of MCS is assisted by the extra information obtained by operating a plurality of parallel power control loops, and overall system throughput is improved.

According to a second aspect of the present invention there is provided a primary station for use in a radio communication system having physical control channels arranged for the bi-directional transmission of sets of control information between a secondary station and a plurality of primary stations, and at least one data channel between one or more primary stations, selected from the plurality of primary stations, and the secondary station for the transmission of data from the or each selected primary station to the secondary station, wherein closed-loop power control means are provided for adjusting the power of some or all physical control channels between the primary station and the secondary station, or parts thereof, to which a set of control information is mapped and means are provided for acquiring or releasing a data channel in response to changing radio link conditions, thereby becoming or ceasing to be a selected primary station.

According to a third aspect of the present invention there is provided a secondary station for use in a radio communication system having physical control channels arranged for the bi-directional transmission of sets of control information between the secondary station and a plurality of primary stations, and at least one data channel between one or more primary stations, selected from the plurality of primary stations, and the secondary station for the transmission of data from the or each selected primary station to the secondary station, wherein closed-loop power control means are provided for

adjusting individually the power of some or all physical control channels, or parts thereof, to which a set of control information is mapped.

According to a fourth aspect of the present invention there is provided a method of operating a radio communication system having physical control channels arranged for the bi-directional transmission of sets of control information between a secondary station and a plurality of primary stations, and at least one data channel between one or more primary stations, selected from the plurality of primary stations, and the secondary station for the transmission of data from the or each selected primary station to the secondary station, the method comprising operating respective closed-loop power control means for adjusting individually the power of some or all physical control channels, or parts thereof, to which a set of control information is mapped and determining which of the primary stations comprise the selected primary station or stations in response to changing radio link conditions.

The present invention is based upon the recognition, not present in the prior art, that by operating multiple parallel closed power control loops the fast selection of suitable sites for data transmission is facilitated and improved operation of a data transmission system may be enabled.

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a block schematic diagram of a radio communication system;

Figure 2 is a block schematic diagram of a radio communication system with a MS in the process of soft handover;

Figure 3 is a diagram of a known UMTS uplink slot structure;

Figure 4 is a diagram of a UMTS uplink slot structure according to the present invention; and

Figure 5 is a flow chart showing a method of transmitting data in accordance with the present invention.



In the drawings the same reference numerals have been used to indicate corresponding features.

5 Referring to Figure 1, a radio communication system comprises a primary station (BS) 100 and a plurality of secondary stations (MS) 110. The BS 100 comprises a microcontroller ( $\mu$ C) 102, transceiver means (Tx/Rx) 104 connected to antenna means 106, power control means (PC) 107 for altering the transmitted power level, and connection means 108 for connection to the  
10 PSTN or other suitable network. Each MS 110 comprises a microcontroller ( $\mu$ C) 112, transceiver means (Tx/Rx) 114 connected to antenna means 116, and power control means (PC) 118 for altering the transmitted power level. Communication from BS 100 to MS 110 takes place on a downlink channel 122, while communication from MS 110 to BS 100 takes place on an uplink  
15 channel 124.

In many radio communication systems, power control is normally operated in a closed loop manner. For uplink power control in a UMTS system the BS 100 determines the required changes in the power of transmissions from a MS 110 and signals these changes to the MS 110 by means of  
20 Transmit Power Control (TPC) commands. To minimise overheads, a TPC command typically instructs the MS 110 to increase or decrease its power, with the change in power being a step of predetermined size. However, in some systems a TPC command may also determine the step size to be used. Similarly, for downlink power control the MS 110 determines the required  
25 changes and signals them to the BS 100 using TPC commands.

In a system made in accordance with the present invention, closed loop power control may also be used to choose parameters such as the most appropriate MCS, since the power level requested by the MS 110 for a downlink physical channel provides an indication of prevailing radio link  
30 conditions. Hence, there is no need for an separate uplink message to be transmitted by the MS 110 to the BS 100 to indicate radio link conditions.

A MS 110 engaged in a soft handover process is illustrated in Figure 2, the MS 110 having three two-way communication channels 226a,226b,226c, each comprising an uplink and a downlink channel, with three respective BSs 100a,100b,100c. In a given time slot the MS 110 receives TPC commands from each of BSs 100a,100b,100c on the downlink channels, and transmits TPC commands to each of the BSs on the uplink channels. In a conventional UMTS system, each MS 110 only transmits one set of uplink TPC commands to all BSs 100a,100b,100c in the active set. Hence, although there is a form of power control loop the powers of the downlink channels are not individually controlled.

In a system made in accordance with the present invention, parallel closed power control loops are set up between a MS 110 and a plurality of BSs 100a,100b,100c to enable a fast BS selection process. Such power control loops could be maintained between the MS 110 and some or all of the BSs 100a,100b,100c in the active set. Such power control loops would be used to control the power of at least some or all of the downlink transmissions to the MS 110, and further such power control loops could also be used to control the power of the respective uplink transmissions. These BSs would probably be chosen to be those in the active set which had the best quality radio links. The closed power control loops with these BSs would enable a very fast selection to be made between them to decide which BS 100a,100b,100c should transmit a packet to the MS 110.

As an example, the BS to use for the transmission of a packet could be chosen to be the BS with the lowest transmit power on the power-controlled physical control channels. The selection could be made either by the MS 110 (by transmitting a BS-selection message to the network) or by the network. The closed loop power control ensures that the transmit power on the downlink channel is already at an appropriate level for the radio link conditions, and it could be used to help predict the most appropriate MCS and/or other parameters.

The operation of multiple parallel closed power control loops requires the transmission of respective multiple sets of control information in both the

uplink and the downlink. As a minimum if such parallel closed power control loops are only used to control the power of downlink transmissions, each set of uplink control information would comprise one or more TPC commands derived from the corresponding downlink set of control information, and each  
5 set of downlink control information would comprise one or more sets of pilot information from which the TPC commands in the corresponding uplink set of control information could be derived by means of a technique such as Signal to Interference Ratio (SIR) estimation. If further such parallel closed power control loops are used to control the power of uplink transmissions, each set of  
10 uplink control information would further comprise one or more sets of pilot information from which the TPC commands in the corresponding downlink set of control information could be derived, and each set of downlink control information would further comprise one or more TPC commands derived from the corresponding uplink set of control information.

15 First consider the uplink. The MS 110 has to transmit a plurality of sets of uplink control information, including TPC commands. In the embodiments described below this is achieved either by mapping each set of control information to a separate uplink physical control channel or by time-multiplexing all the sets of control information into one physical control  
20 channel, or some combination of the two techniques. Other techniques could also be used, for example coding combinations of TPC commands or using higher order modulation schemes.

The first technique involves transmitting separate uplink physical control channels to each of the BSs 100a,100b,100c which have been chosen to  
25 participate in the fast site selection process. In a UMTS implementation, these separate uplink physical control channels would all use the same scrambling code (to identify the MS 110). The uplink physical control channel for each BS 100a,100b,100c could be distinguished by means of one or both of the following methods, for example:

- 30
- Code multiplexing, in which each physical control channel uses a different orthogonal channelisation code. In the current UMTS specifications, only one uplink physical control channel is permitted from each MS 110, and it

always uses a predetermined channelisation code, having a spreading factor of 256 from an OVSF (Orthogonal Variable Spreading Factor) code tree. The additional physical control channels could use any of 63 of the other channelisation codes from the same set while remaining orthogonal to all possible channelisation codes used for uplink data channels.

- I/Q multiplexing. In the current UMTS specifications, the uplink control information is coded on a physical channel which uses the the Q (quadrature-phase) component of the carrier, together with up to 3 data channels, and up to 3 data channels are coded on the I (in-phase) component (prior to complex scrambling). If only 2 uplink sets of control information were required, and no uplink data was being transmitted at the same time, the sets of control information could be I/Q multiplexed (prior to complex scrambling) while using the same channelisation code, thus avoiding the need for multicode transmission for the control channels. It would also be possible to transmit two sets of control information, one on each of the I and Q components, while transmitting a reduced amount of data, with the use of multicode transmission.

Advantageously, the timing of uplink transmissions could be arranged to ensure that there was no need for multicode transmission. For example, it could be arranged for one of the uplink physical control channels to be temporarily switched off whenever some uplink data is to be transmitted.

Control channel gating, i.e. intermittent transmission of a physical control channel, could be used in conjunction with the above methods as a means of reducing MS power consumption and uplink interference levels.

The second technique is time-multiplexing the sets of control information for different BSs, using a modified type of uplink physical control channel. In this case only one uplink physical control channel would be required, using only one channelisation code. Figure 3 illustrates the structure of a frame 300 of a UMTS uplink physical control channel. The frame 300 has a length of 10ms and comprises 15 slots  $S_0$  to  $S_{14}$ . Each slot has a length of 2560 chips and includes 10 bits of control data. Considering the  $i^{\text{th}}$  slot  $S_i$ , it comprises a Pilot (P) field 304, a Transport Format Combination Indicator

(TFCI) field 306, a FeedBack Information (FBI) field 308 and a TPC field 310, each field having a predetermined number of bits.

Time-multiplexing of the TPC commands and pilot fields could then be achieved by one or both of the following methods:

- 5 • Modifying the fields in the uplink physical control channel to permit multiple sets of TPC commands and pilot information to be transmitted at the usual 1500Hz slot rate. The TFCI could be transmitted once, at the highest power required for communication with all relevant BSs 100a,100b,100c. This could include reducing the amount of pilot information sent to each BS.
- 10 Figure 4 illustrates a frame 300 having a modified field structure in accordance with the present invention for use with two BSs. Two pilot fields  $P_1$  404 and  $P_2$  405 are provided, together with two power control fields  $TPC_1$  409 and  $TPC_2$  410. The TFCI field 306 is unchanged from the field structure of Figure 3, while the FBI field 308 has been dropped (because
- 15 there may be no need for accurate transmitter diversity information if only control information is being transmitted). It will be apparent that there are a range of other ways of modifying the field structure to accommodate the requirements of the present invention.
- Reducing the power control rate to each cell. For example, halving the
- 20 power control rate in a scenario where two BSs participate in the fast-selection process avoids the need for any modification to the frame field structure. Each BS only responds to every other TPC command, and similarly uses only every other pilot field for SIR estimation. The TPC rate could be reduced even further (for example in slowly-changing radio links
- 25 with low Doppler frequency) by "gating off" the physical control channel.

Now consider the downlink. Each BS 100a,100b,100c which is participating in the fast-selection process has to transmit pilot information to the MS 110 in order to maintain the closed power control loop for the downlink. If the uplinks are also controlled by closed loop power control, the BSs also

30 have to transmit TPC commands to the MS 110. This is similar to the normal soft handover process, except that each BS 100a,100b,100c calculates its downlink TPC commands based on the SIR of its respective parts of the

respective uplink physical control channel. Possible methods for the downlink include use of different scrambling codes or time-multiplexing of transmissions.

Different scrambling codes could be used to distinguish the sets of control information from the different BSs 100a,100b,100c. This would enable the MS 110 to process the downlink pilot information from each BS separately, so as to generate the different uplink TPC commands required for the different BSs according to their respective downlink SIRs. This would also enable the MS 110 to distinguish TPC commands from the different BSs.

Instead of combining TPC commands received from the different BSs as in the normal soft handover process, for example as disclosed in our co-pending unpublished United Kingdom patent application 0022633.2 (applicants' reference PHGB000121), the MS 110 would adjust the power of each uplink physical control channel (or each part of an uplink physical control channel in the case of time-multiplexed sets of uplink control information) separately according to the TPC commands received from the relevant BS 100a,100b,100c.

Alternatively, the downlink sets of control information from the different BSs 100a,100b,100c could be time-multiplexed in a similar manner to the uplink as discussed above. In this case it may be preferable to combine multiplexing with gating, to avoid synchronisation problems between BSs, in which case the downlink pilot information rate and/or TPC command rate could likewise be reduced.

In embodiments of a system made in accordance with the present invention, certain restrictions could be applied to the uplink transmission powers from the MS 110 to the different BSs 100a,100b,100c. For example, the transmission power ratio between the transmissions to different BSs could be limited to e.g. 6dB, thereby avoiding the generation of substantial interference in one cell because a BS in another cell requests more power while still providing sufficient dynamic range to maintain an adequate uplink error rate for TPC commands. Such a restriction also improves EMC behaviour by avoiding sudden and regular changes in power, and simplifies

implementation of a MS 110 by avoiding the need to be able to implement accurately regular large changes in power.

Alternatively, in the event of the MS 110 reaching its maximum transmission power (according to its power class or as signalled by the network), the primary aim could be to maintain the correct uplink transmission power for the BS 100a,100b,100c with the best downlink SIR. The uplink transmission power to the other BSs could be reduced in order to achieve this. If this resulted in the power ratio between the transmissions to different BSs becoming greater than any pre-determined limit, for example the 6dB limit proposed above, the transmissions to one or more of the BSs other than that having the best downlink SIR could be terminated, or alternatively the transmission power of the transmissions to all the BSs could be scaled down.

In practical implementations, the number of parallel closed power control loops would probably be restricted to 2 or 3 to avoid the complexity of the implementation eliminating the benefits of the fast-selection technique.

A flow chart illustrating a method in accordance with the present invention of transmitting data via one of a plurality of BSs 100a,100b,100c is shown in Figure 5. The method starts, at step 502, when there is data for transmission to a MS 110. Step 504 is a test to determine whether any data remains for transmission. If it does then the BS 100a,100b,100c having the best overall characteristics is selected from those available to the MS 110 for fast selection, at step 506, and a data packet is transmitted to the MS 110 at step 508. The process of testing for data, selecting a BS and transmitting a data packet continues until there is no more data to transmit, when the test 504 for more data fails and the process ends, at step 510.

In practice the amount of data transmitted before BS selection is performed again may be more than one packet, depending on the system overheads of changing the transmitting BS.

In the embodiments described above the data channel is transmitted to the MS 110 from one BS at a time. However, it may be advantageous in some circumstances for data channels to be transmitted simultaneously from more than one BS. For example, in a situation where three BSs 100a,100b,100c are

under closed loop power control, if two of the BSs provide an equally good link quality the data packet or packets may be transmitted concurrently from those two base stations (in a similar manner to transmissions during soft handover).

5 In a variation on the embodiments described above, there could be more than one data link between a primary and a secondary station. For example, the invention could be applied to radio links at different frequencies which therefore require separate power control even if they are between the same pair of stations.

10 From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of radio communication systems and component parts thereof, and which may be used instead of or in addition to features already described herein. It will be appreciated that certain features of the invention which are, for clarity,  
15 described in the context of separate embodiments may also be provided in combination in a single embodiment. Conversely, various features of the invention which are, for brevity, described in the context of a single embodiment may also be provided separately or in any suitable subcombination. Although claims have been formulated in this application to  
20 particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the  
25 same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of features during the prosecution of the present application or of any further application derived therefrom.

30 In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or steps than those listed.



## CLAIMS

1. A radio communication system having physical control channels arranged for the bi-directional transmission of sets of control information between a secondary station and a plurality of primary stations, and at least one data channel between one or more primary stations, selected from the plurality of primary stations, and the secondary station for the transmission of data from the or each selected primary station to the secondary station, wherein respective closed-loop power control means are provided for adjusting individually the power of some or all physical control channels, or parts thereof, to which a set of control information is mapped and means are provided for determining which of the primary stations comprise the selected primary station or stations in response to changing radio link conditions.
2. A system as claimed in claim 1, characterised in that means are provided for encoding each downlink physical control channel, or part thereof, to which a set of control information is mapped with a respective scrambling code to enable the associated primary station to be identified.
3. A system as claimed in claim 1, characterised in that means are provided for transmitting power control commands relating to each downlink physical control channel, or part thereof, to which a set of control information is mapped via a single time-multiplexed uplink physical channel.
4. A system as claimed in any one of claims 1 to 3, characterised in that means responsive to requests from the secondary station are provided for selecting the primary station connected to the or each data channel.
5. A system as claimed in any one of claims 1 to 4, characterised in that means are provided for establishing a plurality of communication links between a primary station and the secondary station, and in that the means for determining which of the primary stations comprise selected primary stations

further comprises means for determining which of the of the communication links are selected.

5        6.        A primary station for use in a radio communication system having physical control channels arranged for the bi-directional transmission of sets of control information between a secondary station and a plurality of primary stations, and at least one data channel between one or more primary stations, selected from the plurality of primary stations, and the secondary station for the transmission of data from the or each selected primary station to the  
10        secondary station, wherein closed-loop power control means are provided for adjusting the power of some or all physical control channels between the primary station and the secondary station, or parts thereof, to which a set of control information is mapped and means are provided for acquiring or releasing a data channel in response to changing radio link conditions, thereby  
15        becoming or ceasing to be a selected primary station.

      7.        A primary station as claimed in claim 6, characterised in that means are provided for determining operational parameters of the data channel depending on the power level of a physical control channel, or part  
20        thereof, to which a set of control information is mapped.

      8.        A primary station as claimed in claim 7, characterised in that the operational parameters are modulation and/or coding schemes.

25        9.        A secondary station for use in a radio communication system having physical control channels arranged for the bi-directional transmission of sets of control information between the secondary station and a plurality of primary stations, and at least one data channel between one or more primary stations, selected from the plurality of primary stations, and the secondary  
30        station for the transmission of data from the or each selected primary station to the secondary station, wherein closed-loop power control means are provided

for adjusting individually the power of some or all physical control channels, or parts thereof, to which a set of control information is mapped.

10. A secondary station as claimed in claim 9, characterised in that  
5 means are provided for determining which of the primary stations comprise the selected primary station or stations in response to changing radio link conditions.

11. A secondary station as claimed in claim 9 or 10, characterised in  
10 that means are provided for transmitting each set of uplink control information over a separate physical channel.

12. A secondary station as claimed in claim 11, characterised in that  
15 means are provided for distinguishing the physical channels by use of different channelisation codes.

13. A secondary station as claimed in claim 11 or 12, characterised  
in that means are provided for distinguishing two of the physical channels by  
transmitting a first physical channel which uses the in-phase component of the  
20 carrier and a second physical channel which uses the quadrature-phase  
component of the carrier.

14. A secondary station as claimed in claim 13, characterised in that  
means are provided for interrupting an uplink physical control channel when  
25 uplink data transmission is required.

15. A secondary station as claimed in claim 9 or 10, characterised in  
that means are provided for transmitting each set of uplink control information  
in a time-multiplexed manner over a single physical channel.

16. A secondary station as claimed in claim 15, characterised in that means are provided for achieving the time-multiplexing by reducing the rate of transmission of power control commands.

5           17. A secondary station as claimed in claim 16, characterised in that the reduction of rate is in proportion to a number greater than or equal to the number of primary stations with which sets of control information are exchanged.

10           18. A secondary station as claimed in claim 15, characterised in that means are provided for achieving the time-multiplexing by including separate power control relating to each primary station with which sets of control information are exchanged in a single physical control channel.

15           19. A method of operating a radio communication system having physical control channels arranged for the bi-directional transmission of sets of control information between a secondary station and a plurality of primary stations, and at least one data channel between one or more primary stations, selected from the plurality of primary stations, and the secondary station for  
20 the transmission of data from the or each selected primary station to the secondary station, the method comprising operating respective closed-loop power control means for adjusting individually the power of some or all physical control channels, or parts thereof, to which a set of control information is mapped and determining which of the primary stations comprise the  
25 selected primary station or stations in response to changing radio link conditions.

          20. A radio communication system constructed and arranged to operate substantially as hereinbefore described with reference to and as  
30 shown in the accompanying drawings.

21. A primary station constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

5           22. A secondary station constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

10           23. A method of operating a secondary station substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

## ABSTRACT

**RADIO COMMUNICATION SYSTEM**

5        A radio communication system comprises a secondary station (110) having a plurality of communication channels (226a,226b,226c) with a plurality of primary stations (100a,100b,100c). Separate closed loop power control is performed for each of the communication channels (226a,226b,226c), thereby enabling the optimum primary station for transmission of data to the secondary  
10    station (110) to be selected. Parameters derived from operation of each power control loop also enable optimum setting of channel parameters for each primary station (100a,100b,100c).

      Such an arrangement is particularly suitable for a high speed downlink data service, where the fast selection of the optimum primary station improves  
15    link robustness and system throughput.

(Figure 2)

1/3

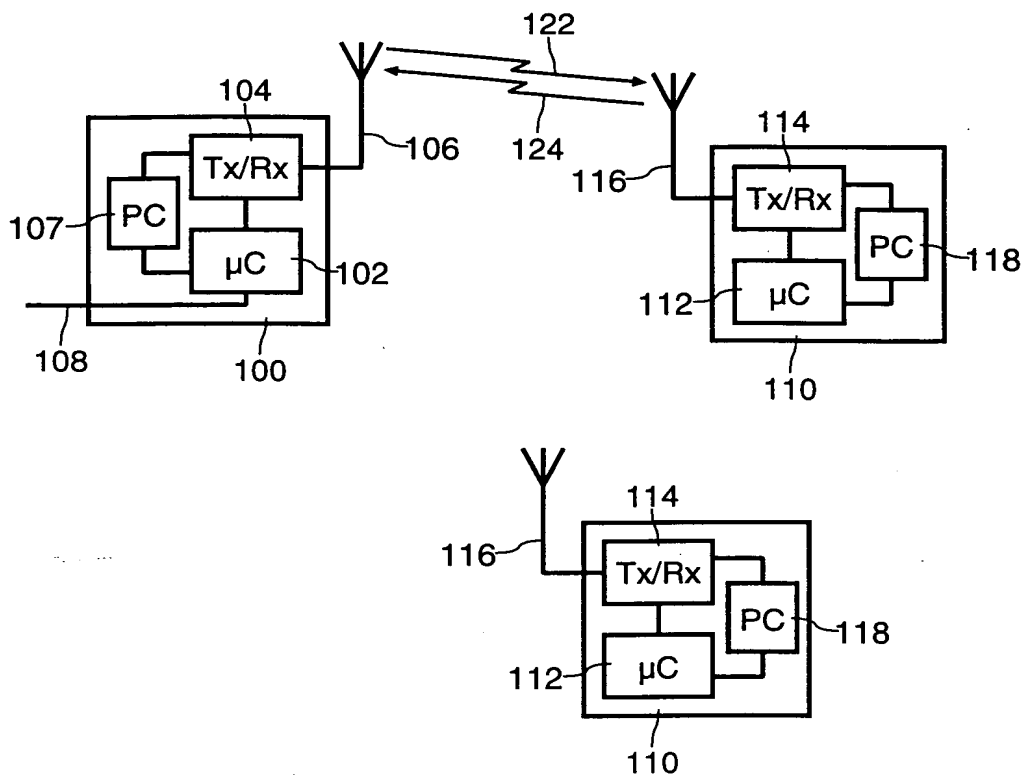


FIG. 1

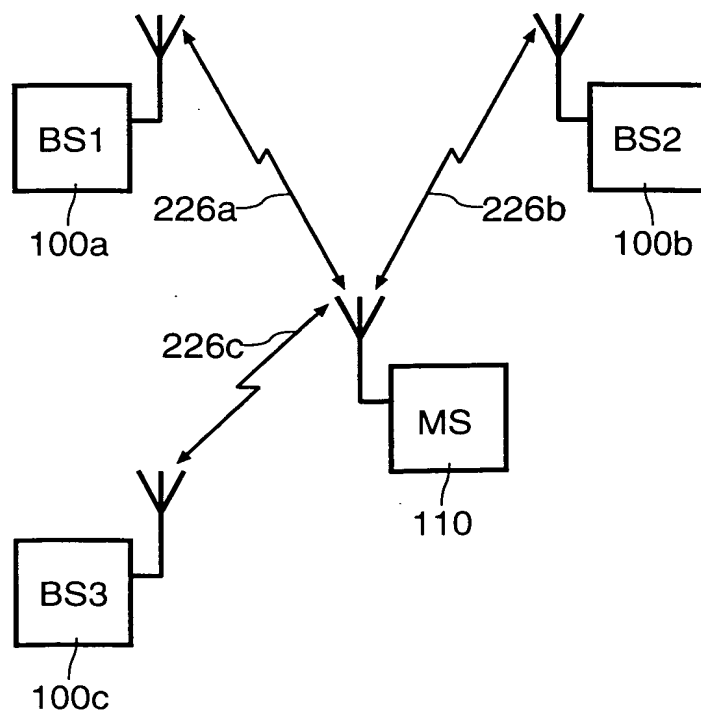


FIG. 2

2/3

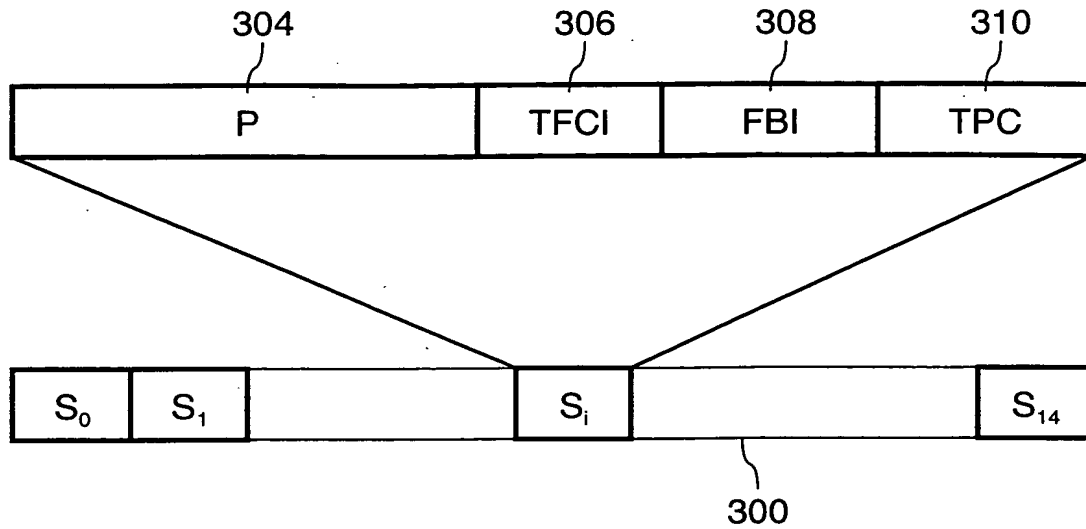


FIG. 3


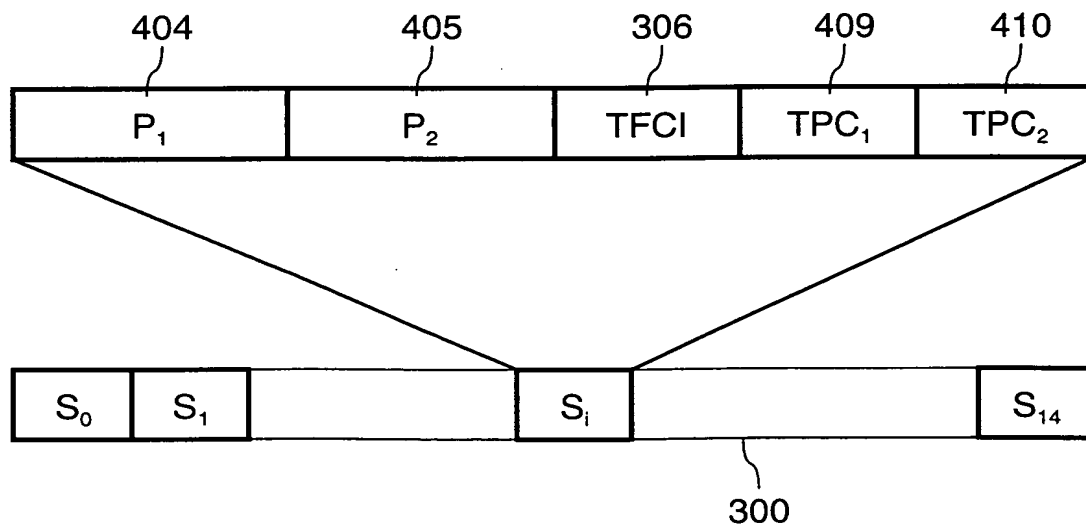


FIG. 4

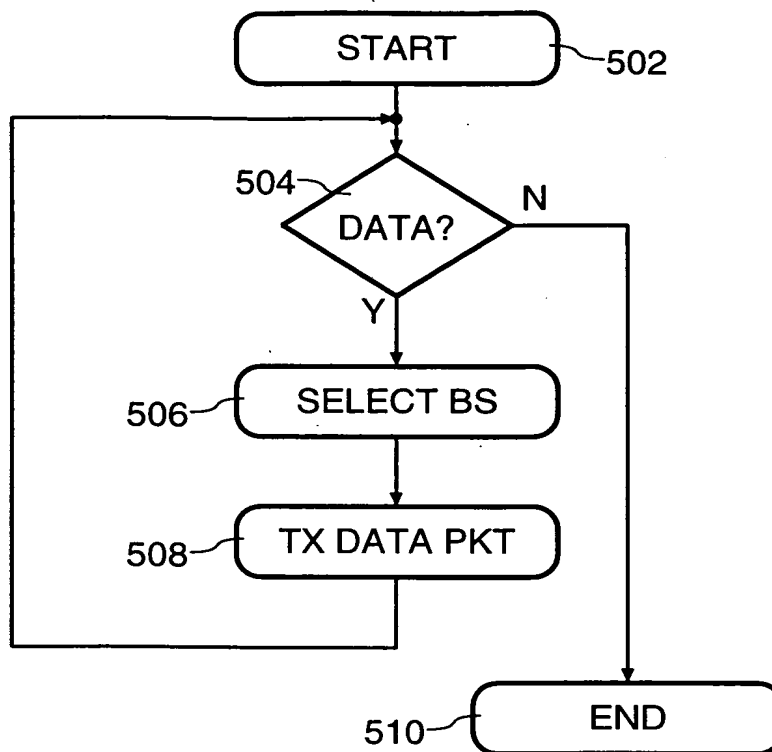

3/3



**FIG. 5**

**THIS PAGE BLANK (USPTO)**